

## Large-Tank Heating Systems



RSTO

LTFX

### Description

Chromalox offers four uniquely designed electric heating systems for large storage tanks. The systems can be installed in above or below-ground tanks made of steel, concrete, or fiberglass.

Complete with Chromalox® controls, these large-tank heating systems can be operated with little or no manual attention. Heat can be applied by using strategically located sensors to monitor tank temperatures and energize the heaters. The heating operation may be fully automated by using timers and controllers to program the start and stop of both off-peak and daytime heating functions.

In addition to operating convenience, Chromalox® large-tank electric heating systems require very little upkeep and are practically maintenance-free. The result is substantially reduced operating costs over alternative heating methods.




FXTH



OCE

## Open Coil Element Pipe Insert Heaters

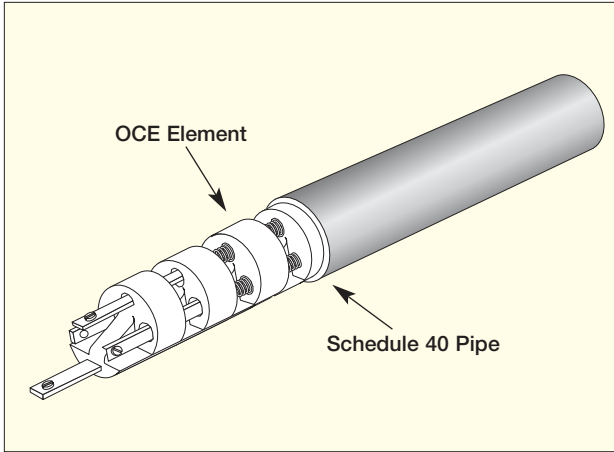

### Applications

Chromalox® OCE open coil element large-tank electric heaters installed inside 2- or 3-inch Schedule 40 NPS pipe provide uniform heat over a large surface area. This method of indirect heating lowers the watt density or heat flux on the surface area of the pipe in contact with the heated media, reducing the tendency to coke or break down heat-sensitive materials.

### Features

<b>Easy installation</b>	Requires only 3 feet for installation or removal in cramped areas
<b>Highly flexible</b>	Can be bent in a vertical plane at minimum 12-inch radius
<b>Heavy-gauge bus bars</b>	Provide spacing of heated section away from terminal area
<b>Heavy-gauge resistance wire</b>	Provides reliable service and long element life


### Construction

Heavy-gauge resistance wire coils are mounted into high-density electrical ceramics. The ceramics are strung on a continuous support bar to provide sufficient rigidity to insert the assembly into 2- or 3-inch Schedule 40 NPS steel pipe for installation in tanks.

### General Specifications

<b>Available Diameters</b> .....	1.875 and 2.750 in. OD
<b>Lengths</b> .....	60 to 320 in. (5 to 26 ft)
<b>Operating Temperature</b> .....	0° to 750°F
<b>Single Element Rating</b> .....	4 to 20 kW
<b>Watt Density</b> .....	3 to 12 W/in. <sup>2</sup>
<b>Voltage</b> .....	240 and 480 Vac, 3 Phase

## Large Tank Flange Heaters (LTFX)

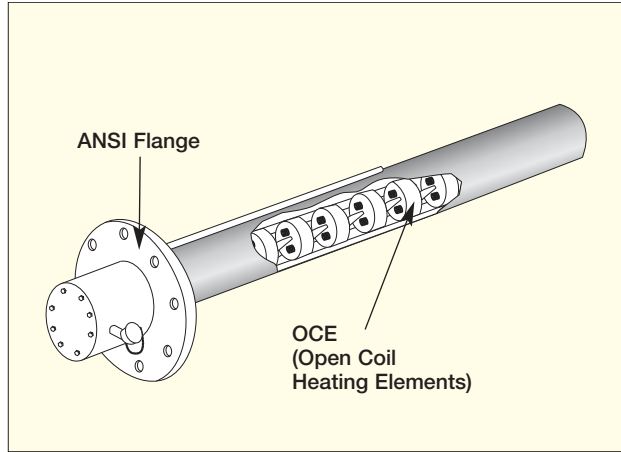

### Applications

LTFX heaters provide low-watt-density heating over a large surface area while providing precise temperature control for such materials as fire water storage, asphalt, diesel lube oils, ethanol, bio-diesel fuel, glycerin, animal fats, vegetable oils, fuel oils, or similar types of liquids.


### Features

<b>No tank draining</b>	Heating elements can be inspected or changed without the need to drain the tank, saving both time and money
<b>Minimal space</b>	OCE-style elements can be bent during insertion or removal to a vertical plane with as little as 12 inches of clearance
<b>Matching control panel</b>	Each unit can be matched with a corresponding control panel, mounted separately or installed directly on the LTFX heater, to ensure seamless operation
<b>Quick &amp; easy installation</b>	Standard ANSI flange provides a straightforward mating connection with no special modifications
<b>Overtemperature sensor</b>	Each unit comes equipped with a type J thermocouple for temperature sensing on the pipe wall
<b>Clean, pollution-free electric heat</b>	No open flames, no additional plumbing connection, quiet operation, and better efficiencies with precise control and simple operation

### General Specifications

<b>Connection Size</b> .....	4 to 14 in., 150# ANSI Flange
<b>Immersion Length</b> .....	.5 to 25 ft
<b>Operating Temperatures</b> .....	0° to 750°F
<b>Element Rating</b> .....	4 to 240 kW
<b>Voltage</b> .....	240 and 480 Vac, 3 Phase

## Flexible Tank Heaters

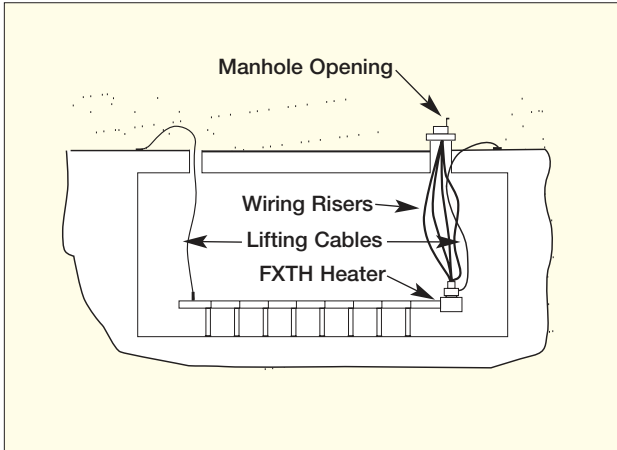

### Applications

Chromalox® FXTH flexible tank heaters provide low-watt-density heating for viscous materials such as asphalt, fuel oil, pitch and tar, liquid sugar, molasses, lube oils, linseed oil, and other heat-sensitive materials.

These heaters are particularly useful for storage tanks that are underground or when the tank ends are inaccessible for installation of more conventional heaters. They can be installed through the normal manhole opening of many large tanks above or below ground without requiring modification to the tank itself. Chromalox® FXTH flexible tank heaters can be used in steel, concrete, and fiberglass tanks or in open-top process tanks.

### Construction

The basic heater assembly consists of carbon steel flexible pipe, terminal enclosure, 14-foot risers, two lifting cables, and 4-inch-high sludge legs. Stainless steel is also available.

### Optional Control Center

An optional Chromalox® NEMA 4 weatherproof or NEMA 12 oil- and dust-tight electrical control center is available completely wired with indicating electronic process control, fail-safe overtemperature controls, master circuit breaker, contactors, fuses, pilot lights, switches, and control transformer. Other control options include digital chart recorders, timers, and audible alarm.

One control center can control multiple heaters in the same tank. The control center is mounted remotely on mounting legs or with vertical wall-mounted brackets and hasp and staple for padlocking.

### Features

<p><b>No tank modification required</b></p> <p><b>No hot spots or carbonization</b></p> <p><b>Low profile</b></p> <p><b>High wattage at low watt density</b></p> <p><b>Durable</b></p> <p><b>Weatherproof terminal enclosure</b></p>	<p>Installs through normal manhole opening with no cutting or welding</p> <p>Heat is evenly spread along the bottom of the tank</p> <p>Provides maximum use of the tank volume and maintains heat even at low levels</p> <p>Plenty of capacity without overheating the material</p> <p>Uses long-lasting Chromalox® open coil heaters</p> <p>Contains process and overtemperature thermocouples; overtemperature thermowell (one per tube) is attached to the heater sheath</p>
--	---


### General Specifications

<b>Immersed Length</b> .....	12 to 40 ft (1, 2, or 3 assemblies)
<b>Minimum Manhole Diameter</b> .....	14 in.
<b>Operating Temperature</b> .....	50° to 225°F
<b>Element Rating</b> .....	6 to 60 kW
<b>Watt Density</b> .....	4.1 to 6.5 W/in. <sup>2</sup>
<b>Voltage</b> .....	240 and 480 Vac, 3 Phase



Chromalox® MCC Control Center

## Unitary Immersion Heater Systems

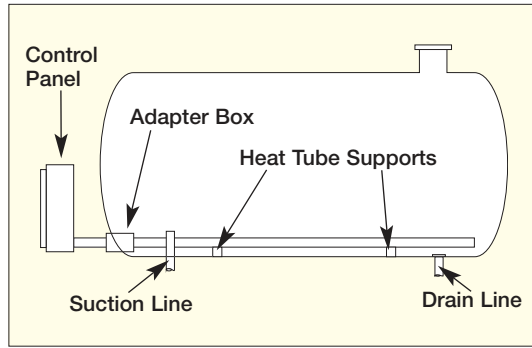

### Applications

Chromalox® RSTO and RST unitary electric immersion systems provide low-watt-density heating for viscous materials such as asphalt, fuel oil, pitch and tar, liquid sugar, molasses, lube oils, linseed oil, and other heat-sensitive materials. They can be installed in above-ground tanks and in below-ground tanks with access to one tank end.

Model RSTO unitary electric immersion heater systems with open coil element (OCE) heaters are recommended for cramped locations because the open coil heating elements can be bent in a vertical plane on a 12-inch minimum radius and require only 3 feet for installation or removal. The RST model features metal-sheathed heating elements in place of the open coil elements. Both the RSTO and RST models are removable without draining the tank. A liquid-tight adapter box is provided for welding the heater assemblies to the tank header.

### Construction

The heating elements are inserted into an assembly of 3-inch Schedule 40 NPS carbon steel or stainless steel pipes. The heaters are self-contained with built-in controls mounted in a weatherproof electrical enclosure.

There are two options for tank installation. The pipes can be welded into an adapter box for convenient field welding of the entire assembly to the header of a steel tank. Or the pipes can be welded into a Chromalox adapter flange or standard ANSI flange for mechanical integration with the tank. This allows for future removal and capping off the access port with a blind flange.

### Features

<b>Pre-engineered package</b>	Unitary immersion heater systems are equipped with temperature and power controls, as well as safety cutouts
<b>Economical</b>	Ready for use once attached to the tank with no further operator attention required
<b>Minimal maintenance</b>	Heavy construction design; ideal for applications involving blast cleaning or routine tank cleanout
<b>Weatherproof</b>	Weatherproof control panel protects contactors fusing and heater terminations

### General Specifications

<b>Immersed Length</b> .....	15 to 26 ft
<b>Operating Temperature</b> .....	50° to 400°F
<b>Hold Temperature</b> .....	175° to 350°F
<b>Element Rating</b> .....	15 to 72 kW
<b>Watt Density</b> .....	3 W/in. <sup>2</sup>
<b>Voltage</b> .....	240 and 480 Vac, 3 Phase

## Chromalox®

PRECISION HEAT AND CONTROL

**Chromalox, Inc.**  
103 Gamma Drive  
Pittsburgh, PA 15238  
USA

Phone: (412) 967-3800  
Fax: (412) 967-5148

email: sales@chromalox.com  
www.chromalox.com

**Chromalox-UK.**  
Eltron House  
20-28 Whitehorse Road  
Croydon, Surrey, CR9 2NA, UK

Tel: +44 (0)20 8665 8900  
Fax: +44 (0)20 8689 0571

email: uksales@chromalox.com  
www.chromalox.co.uk

**Chromalox-France**  
Route de Château-Thierry  
Noyant et Aconin  
F-02203 SOISSONS Cedex, France

Tel: +33 (0)3 23 74 39 39  
Fax: +33 (0)3 23 74 39 00

email: etirexchromalox@wanadoo.fr  
www.chromalox.fr

**Chromalox-China**  
Chromalox (Shanghai) Precision Heat  
and Control Co., Ltd.  
Suite A2, 4th Floor, Fenggu Building  
88 Taigu Road  
Waigaoqia Free Trade Zone  
Shanghai 200131  
People's Republic of China

Tel: 011-86-21-5866-8802  
Fax: 011-86-21-5866-8803

email: sales@chromalox.com  
www.chromalox.cn